


DP-35 Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-35
Differential Voltage DC + AC peak	1600V
Bandwidth (50Ω load -3dB)	35MHz(25MHz at x10)
Common Mode Voltage DC + AC peak	1600V
Common Mode Voltage RMS CAT II / CAT III	560Vrms
Attenuation (Switchable)	X10, X100
Input R (Each Input)	4.5MΩ ± 2%
Input C (Each Input)	3.4PF ± 5%
Maximum Operation Voltage (DC+ AC peak)	≤ 160V at x 10 ≤ 1600V at x 100
Common Mode Rejection Ratio (CMRR)	60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1MHz: > 300 : 1
Noise (Into 50Ω Load)	≤ 1.0m Vrms
Input Impedance (Between Input)	9MΩ // 1.7 PF
Accuracy (at 20~30°C 70%RH after 20 minutes)	≤ ± 2%
Maximum Output Voltage	≤ ± 8V
Power Source	External 9V DC Adaptor
Other	Over Range Indicate



ACCESSORIES:

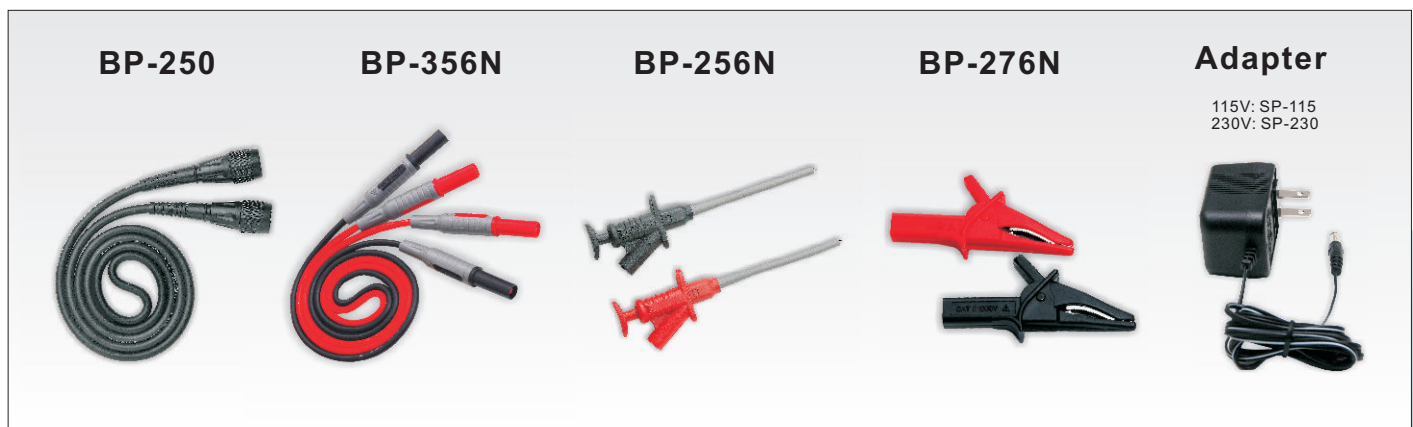

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT

GLOBALMEDIAPRO, s.r.o.

<http://www.globalmediapro.cz>