

Portable 3GSDI 1 to 4 Distributor

SWIT®

S-4604

Introduction:

The S-4604 is a portable 3G/HD/SD-SDI distributor. It supports 1 SDI input, and 4 SDI output, with embedded audio. There're Power/Input/Output status indicators to check the connection conditions and availability of distribution.


S-4604 is heavy duty housing design, protecting the BNC connectors well, and supplied various screw threads in the bottom, for convenient installing, and future accessories (battery mount, etc)

Features:

- ◆ Portable 3G/HD/SD-SDI distributor
- ◆ 1 SDI input, 4 SDI output
- ◆ Power/Input/Output status indicators
- ◆ Heavy duty housing
- ◆ Bottom screw threads for installing

Specifications:

Input	3G/HD/SD-SDI×1		
Output	3G/HD/SD-SDI×4		
Format	SDI	SMPTE-425M	1080p (60 / 59.94 / 50)
		SMPTE-274M	1080p (30 / 29.97 / 25 / 24 / 23.98)
			1080i (60 / 59.94 / 50)
		SMPTE-296M	720p (60 / 59.94 / 50)
		ITU-R BT.656	576i (50)
	SMPTE-125M	480i (59.94)	
Power	≤ 2W		
Working Voltage	DC 6-18V		
Working Environment	Temperature: 0°C+70°C, Humidity:10%-90%		
Dimension	105×84.15×29 mm		
Net weight	210g		

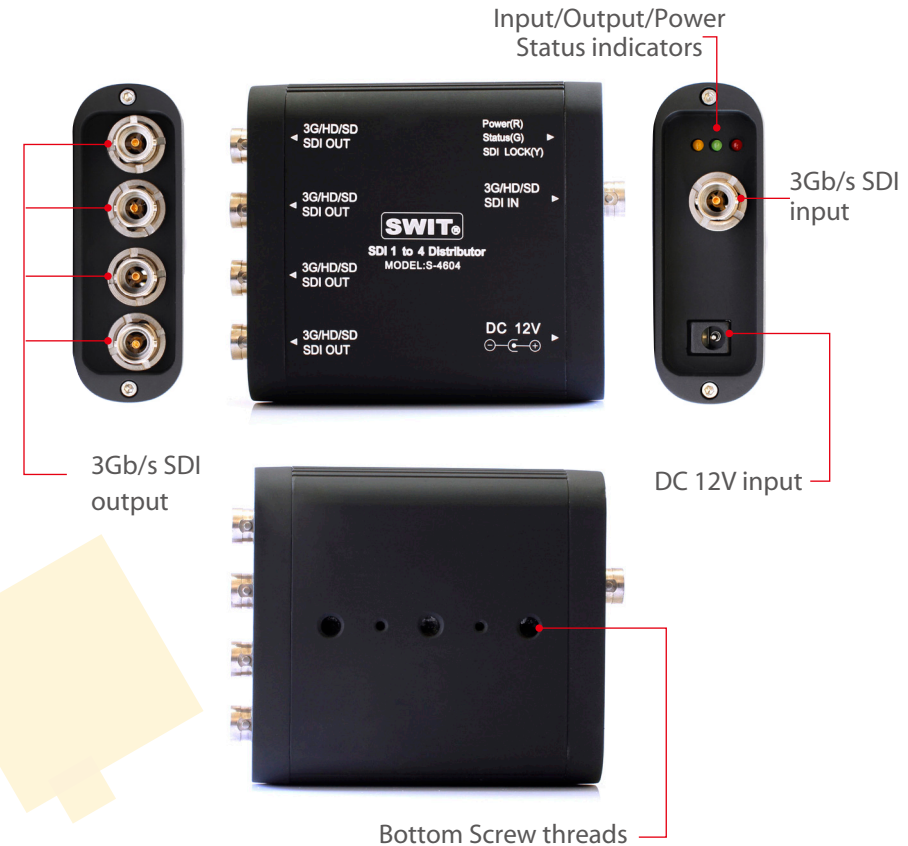

SWIT Electronics Co., Ltd.

Website: www.swit.cc
Email: contact@swit.cc
Tel: +86 25 85805753
Fax: +86 25 85805296

Distributed by:

GLOBALMEDIAPRO, s.r.o.
sales@globalmediapro.cz
Tel.: +420 775 122 666